


# Piezo - the exclusive touch

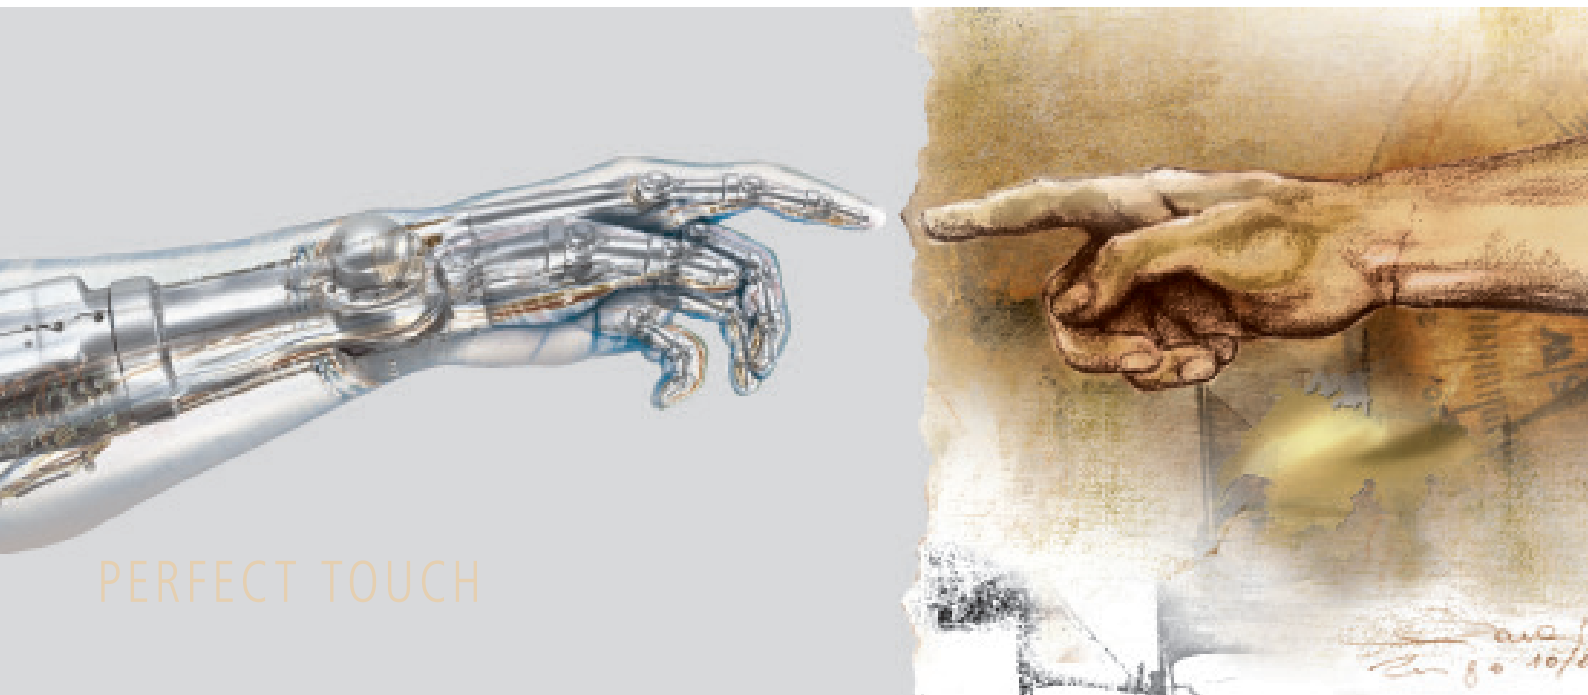


## An ingenious phenomenon ...

... is based on the piezo element: the release of voltage through pressure. The crystalline elements are predestined for use in keyboards. Their sensitivity is so extreme, that the switching cycle can even be produced through 4 mm thick panels, which can be made from many different materials.

We have perfected piezo technology. In the past, ceramic elements have been incorporated in the technical parts of a keyboard, but we have developed a technology to apply piezo-electric lacquer on the surface. This unique method, developed and patented by ALGRA, guarantees the same precise switching characteristics as conventional piezo elements.

### Piezo electricity

In 1880, the French physicists Pierre and Jacques Curie discovered that mechanical pressure on the surface of certain crystals (e.g. PZT, lead-zirconate-titanate) generates electrical charges. They called this phenomenon the piezo effect. «Piezo» originates from the Greek and means both «pressure» or «press». An electrical charge can be measured on two crystal surfaces while the pressure changes (bending, stretching, pressing) which is proportional to the force expended. The stretching is extremely minimal – ultimately a crystal cannot be pressed together like a sponge.

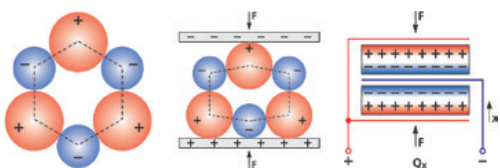

The illustrations provide a greatly simplified presentation of the functions of the piezo effect. The first image shows a rendering of a six-sided crystal structure cell. All charges are mutually equalized so that the cell has a neutral electrical effect from the outside in. The pressure on this structural cell (image in centre) causes a shift of the centres of gravity of the positive and negative charges against each other. The resulting difference in the charge is evaluated as voltage or a charge (right image).

# Known applications

## Lighter

Here a small hammer is pre-stressed which then strikes the piezo-electrical crystal. A spark can be generated by the resulting voltage which ignites the gas.



## Alarm clocks

Most electronic alarm clocks use the piezo effect. Acoustic pressure is formed through the creation of alternating voltage which wakes up even the deepest of sleepers.



## Pick-ups for musical instruments

Piezo-electrical pick-ups are attached, for example, on the bridge of a guitar under the strings. They pick up the vibrations created by the strings. These vibrations are converted into electrical signals. A solution which has had a sustained influence on rock and pop music.




## Alarm systems

Sensors, e.g. on the panes of display windows, pick up the impact sounds and convert them to electrical signals. Sounds and vibration which are caused by instruments used for a break-in result in the alarm being triggered just as the break-in attempt begins.



## Buzzers

Conversely, the electrical vibration can be transferred to a crystal using the inverse piezo effect. The air is made to vibrate and thereby becomes audible.



# Piezo-electrical switches

Piezo-electrical switches only need a stroke from 1 to 10µm in order to generate a usable turn-on voltage or charge. It is rather the application of force as motion which creates an output signal in the switch element. The switch processes are triggered even through several millimetres of thick plates.

Because the required movement is negligibly small for the activation of a piezo-electrical switch element, the designers can use practically any material for every overlaying; polyester, polycarbonate, anodized aluminium, steel or other metals, plexiglass and glass, wood or even stone. The keyboard can even be bent depending on the materials. This makes environmental and aesthetic compromises no longer necessary in the man-machine interface.

It also means that every window in the overlay (e.g. for LC displays) should be made thick enough to guarantee the most reliable protection even in the roughest environments. When overlay materials are selected, requirements such as moisture, chemicals or even resistance to rays can be taken into account. These keyboards can resist any type of vandalism.

ALGRA offers its own ASIC which intensifies and digitalizes the piezo-electrical signals. These CMOS signals are available as serial, parallel and as a matrix for further processing. Standardized interfaces are also available; the switch sensitivity is also set electronically through the adjustment of the switch point on the IC. This setting can be made when the switch is manufactured, at our internal electronics laboratory or is offered to the user as an option.



# ALGRA

ALGRA AG  
Rigistrasse 1  
CH-5634 Merenschwand  
Tel. +41 56 675 45 45  
Fax +41 56 675 45 75  
mail@algra.ch  
www.algra.ch